



TECHNICAL SPECIFICATION

| | |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model | VMT-4923-FB-3A-12TL-PLT |
| Length of the Trailer | 12200± 15mm |
| Width of the Trailer | 2600± 10mm |
| Unladen Height of Trailer | 1490± 25mm |
| Unladen Weight of the Trailer | 7 Tons approx |
| Payload Carrying Capacity | 35 Tons |
| Gross Weight of the Trailer | 42Tons |
| Chassis | All welded steel construction. Main Longitudinal Beam : 450(depth) X 160 (flange width) x 16(flange thickness) x 10(web thickness). Cross Member will be rolled steel ISMC 150 with 700mm pitch. Side Skirting and Bumper will be rolled steel ISMC 150. Floor from 4mm chequered plate. |
| Axles | Tridem axle fitment. Ends of axles are precision machine to receive taper roller bearings. Hub, Brake drum etc. The hubs are provided with 10 bolt fittings.(TATA/Leyland Make) |
| Suspension | Tridem Suspension with load equalizing brackets. Free ended semi elliptical leaf springs. Width of Leaf – 80mm Thickness of Leaf – 13mm No. of Leaves – 13 Material – EN 45A (Unik Make) |
| Tyre | 10.00x20 – 16 Ply rating – 12 Nos. (CEAT/J.K. Make) |
| Wheel Rim | B 7.5 HD x 20 – 12 Nos. |
| Kingpin | Dia. 50.8mm. King pin equivalent to IS 6763 Type B (VMT Make) |
| Twist Lock | 12 Nos. Twist Locks (VMT Make) |
| Landing Legs | 2 Gear Type (York /Jost/Fuwa Make) |
| Brakes | Twin line air brake system coupled to tractor brakes are actuated by tractor. |
| Electrical | 24V D.C. and all other electrical accessories required for heavy vehicles |
| Painting & Shot Blasting | Chassis will be completely shot blasted before painting. Two coats of primer and two coats of finish enamel paint to color of customer choice. |
| Suitable Tractor | AL 4921, AMW-4923, TATA LPS-4923 |

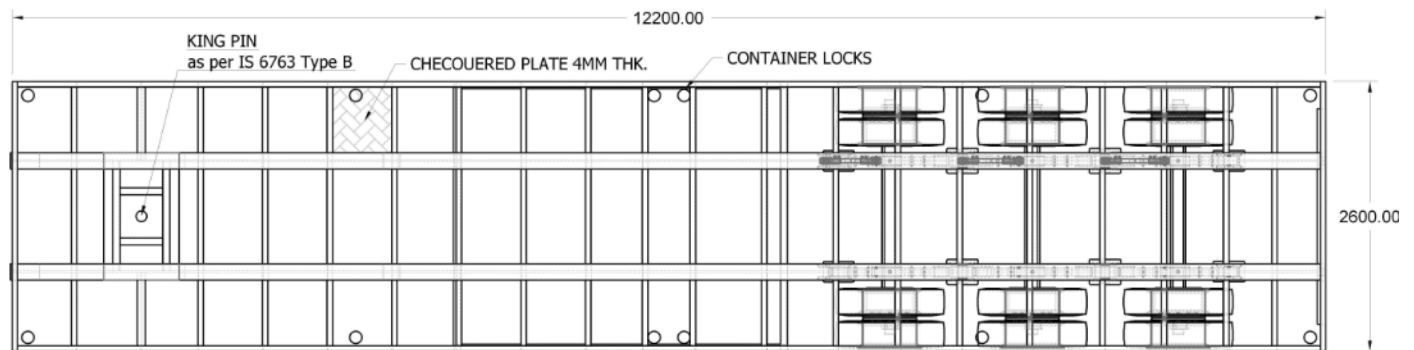

Plan

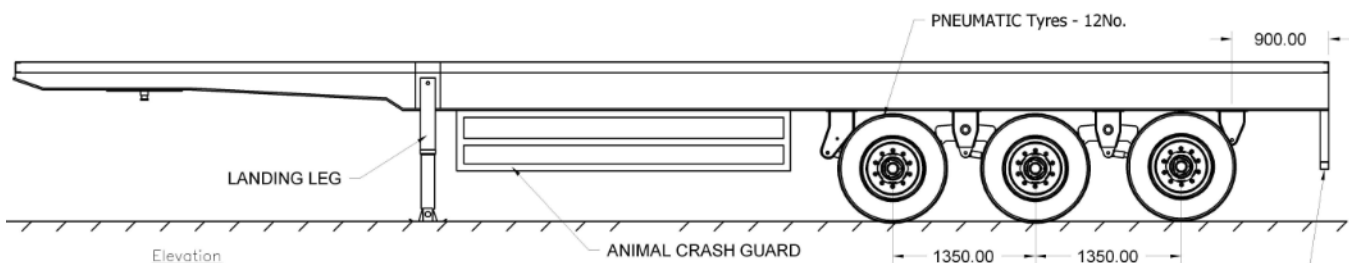


Elevation




Container Trailer-Flatbed

TECHNICAL SPECIFICATION

| | |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model | VMT-4018-FB-3A-12TL-PLT |
| Length of the Trailer | 12200± 15mm |
| Width of the Trailer | 2600± 10mmd |
| Unladen Height of Trailer | 1490± 25mm |
| Unladen Weight of the Trailer | 7Tons approx |
| Payload Carrying Capacity | 28Tons |
| Gross Weight of the Trailer | 35Tons |
| Chassis | All welded steel construction. Main Longitudinal Beam : 425(depth) X 150 (flange width) x 16(flange thickness) x 10(web thickness). Cross Member will be rolled steel ISMC 150 with 700mm pitch. Side Skirting and Bumper will be rolled steel ISMC 150. Floor from 4mm chequered plate. |
| Axles | Tridem axle fitment. Ends of axles are precision machine to receive taper roller bearings. Hub, Brake drum etc. The hubs are provided with 10 bolt fittings.(TATA/Leyland Make) |
| Suspension | Tridem Suspension with load equalizing brackets. Free ended semi elliptical leaf springs. Width of Leaf – 80mm Thickness of Leaf – 13mm No. of Leaves – 13 Material – EN 45A (Unik Make) |
| Tyre | 10.00x20 – 16 Ply rating – 12 Nos. (CEAT/J.K. Make) |
| Wheel Rim | B 7.5 HD x 20 – 12 Nos. (Kalyani Lemmerz Make) |
| Kingpin | Dia. 50.8mm. King pin equivalent to IS 6763 Type B (VMT Make) |
| Twist Lock | 12 Nos. Twist Locks (VMT Make) |
| Landing Legs | 2 Gear Type (York Make) |
| Brakes | Twin line air brake system coupled to tractor brakes are actuated by tractor. |
| Electrical | 24V D.C. and all other electrical accessories required for heavy vehicles |
| Painting & Shot Blasting | Chassis will be completely shot blasted before painting. Two coats of primer and two coats of finish enamel paint to color of customer choice. |
| Suitable Tractor | AL 4018, AMW-4018, TATA LPS 4018 |

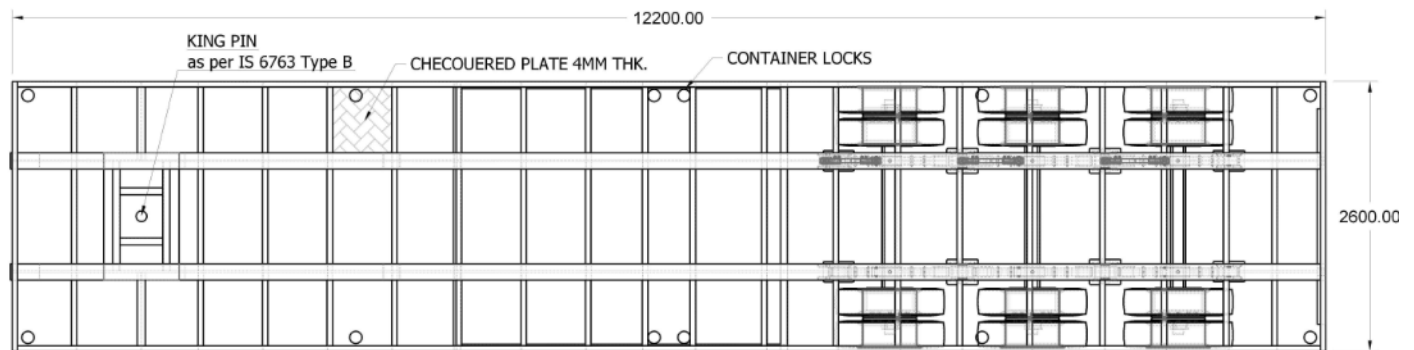

Plan

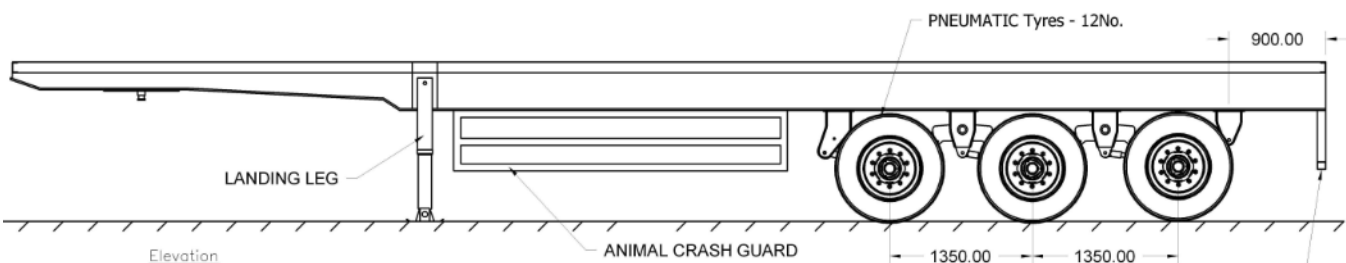

Elevation